FAC350

Conventional VAD, Shallow Base, Ceiling Mount - Red Flash



FAC350

Conventional VAD, Shallow Base, Ceiling Mount - Red Flash

Spécifications techniques

Electrical

Current consumption	20mA @ 0.5 Hz / 40mA @ 1 Hz

Physical

Net weight	215 g
Colour	Rot
Material	Alto impacto policarbonato

Environmental

Operating temperature	-25 to +70°C
Relative humidity	5 to 95%
Environment	Drinnen
IP rating	IP21

Regulatory

Certification	EN54-23

EN54-23 Coverage: C–3-8.9

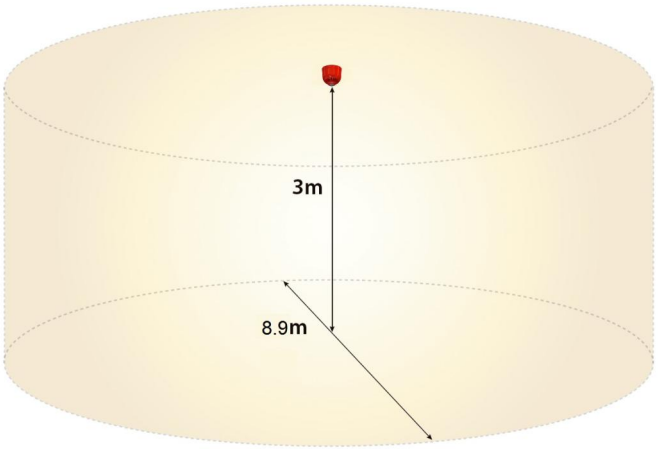

KIDDE GLOBAL SOLUTIONS

En tant que société d'innovation, Kidde Global Solutions se réserve le droit de modifier les spécifications des produits sans préavis. Pour les dernières spécifications du produit, visitez le site web be.firesecurityproducts.com ou contactez votre représentant commercial.

Last updated on 12 November 2026 - 18:57