W76556

EN Grade 2 PIR Detector



Details

- 15m/10m volumetric PIR detector
- Enhanced PIR processing
- Quad detector
- Adjustment-free optics
- Redesigned housing shared across platform range
- Varifocal lens design
- EN50131 Grade 2

W76556
EN Grade 2 PIR Detector

Technische specificaties

General

Technology	PIR
Application type	Montaggio a parete
Anti masking	No
Pet immune	No
Camera	No
Pry-off tamper kit	A bordo

Detection

Max. detection range	15 m
Detection range	15 m
Undercrawl protection	No
Alarm time	3 sek

Wired/wireless

Wired-wireless	Kablede

Electrical

Power supply value	9 to 16 VDC (12V nominal)
Current consumption	11 mA 9 mA

Physical

Physical dimensions	110 × 66 × 42 mm
Shipping weight	110 g
Colour	Hvid

Environmental

Operating temperature	-10 to +50°C
Relative humidity	95.00%
Environment	Indendør

Regulatory

Compliancy	CE



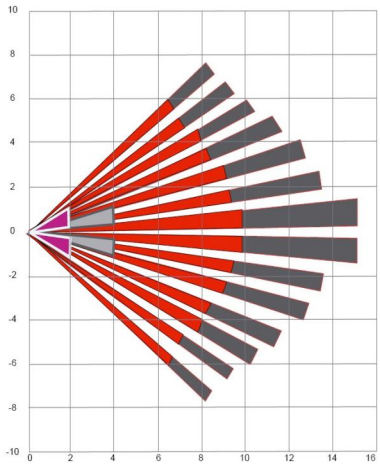

Als een bedrijf van innovatie behoudt Kidde Global Solutions zich het recht voor productspecificaties zonder kennisgeving te wijzigen. Ga voor de nieuwste productspecificaties online naar be.firesecurityproducts.com of neem contact op met uw verkoopvertegenwoordiger.

Last updated on 12 November 2026 - 18:57