240320

Konwencjonalny ręczny ostrzegacz pożarowy DIN - Hausalarm

General

The 240320 is a BLUE, type-B, buble action manual call point for surface mount applications.

Construction

In comparison with plastic cases, the robust design housing made of die-cast aluminium proves to be of advantage even after years of use, thanks to its resistance to environmental impact. It is virtually unbreakable, form stable and hardly changes its colour in sunlight.

Numerous design details, such as the self-closing lock cover, protect the interior from dust or water penetration and facilitate mounting and cabling. The protection class is IP43.

Safety

The door with the easily replaceable glass pane has an opening angle of over 180°. When the call point is activated, the door is mechanically prevented from closing



Szczegóły

- Conventional technology
- Alarm LED for activation indication
- Operating instructions using standardised EN54-11 symbols
- Attractive design with a housing made of robust die-cast aluminium
- Designed for surface mount applications
- EN standard type B manual call point, dual action
- 1000 Ohm series resistor fitted

240320

Konwencjonalny ręczny ostrzegacz pożarowy DIN - Hausalarm

Specyfikacja techniczna

General

Status indication	LED
Connectivity	2-żyłowa strefa

Electrical

Power supply type	Zone angetrieben
Operating voltage	10 do 30 VDC
Cable specification	< 1.5 mm²
Terminals	6

Detection

Detection principle	Aktywacja ręczna
Monitoring	Off, On
Installation height	Określona przez przepisy lokalne

Output

Output quantity	1
Output type and rating	Kontakt (25 VAC @ 2A lub 60 VDC @ 2A)

Physical

Physical dimensions	127 x 127 x 35 mm (S x W x G)
Net weight	420 g
Colour	Blau (RAL 5015)
Mounting type	Oberflächenmontage, Wandmontage
Material (body)	Aluminium-Druckguss
Functional marking	HAUSALARM

Environmental

Vandal proof	No
Relative humidity	5 do 95% bez kondensacji
Environment	Drinnen
IP rating	IP43 (standard)

Regulatory

Compliancy	CE, REACH, RoHS 3, WEEE

Wyroby zgodne

Kategoria	Odniesienie	Opis
Detection device	DM966	Wymienne przezroczyste szybki do ręcznych ostrzegaczy pożarowych

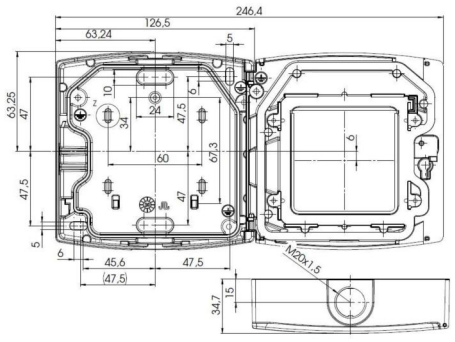

Będąc firmą innowacyjną, Kidde Global Solutions zastrzega sobie prawo do zmian w specyfikacji wyrobów bez uprzedzenia. W celu uzyskania najnowszych specyfikacji prosimy o wizytę na stronach pl/firesecurityproducts.com lub kontakt z przedstawicielem handlowym.

Last updated on 12 November 2026 - 18:57